


SCULPT™ PARALLEL TILE INSTALLATION


These instructions apply to all Sculpt™ Parallel designs such as Classic, Cove, Diamond, Fort, Mod, Peak, Quadrant, Random, Ridge, Steps, Taper, Tide, & Zig.

Supplied

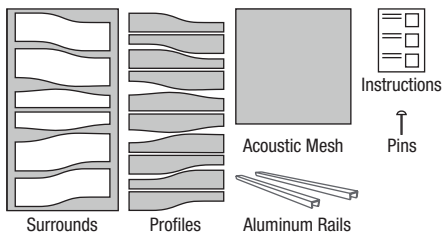


	24 Tile	48 Tile
Tiles	8	4
Acoustic Mesh	8	4
Aluminum Rails	16	8
Pins	32	24


*Please Note: Component qty's above are doubled for Sculpt™ Classic Shallow

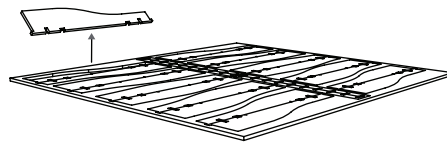


Step 1
Remove the profiles from their protective surrounds.

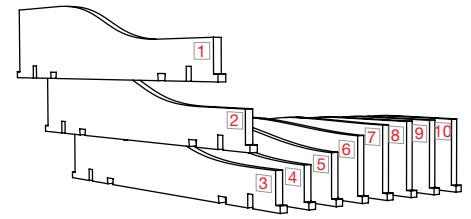


Step 2
Arrange the profiles in sequence using the removable numbers and letters applied to each profile.

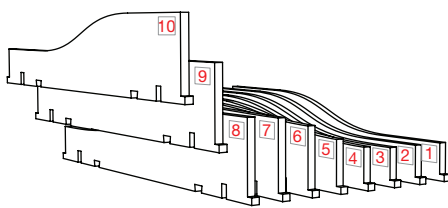


Note
To achieve a mirrored pattern, the order of the sequence must be reversed on tiles as required to achieve desired result. Refer to the Reflected Ceiling Plan.

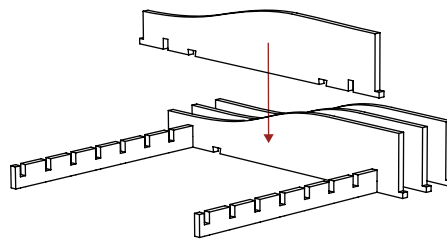



Step 3
Push the profiles into the two combs

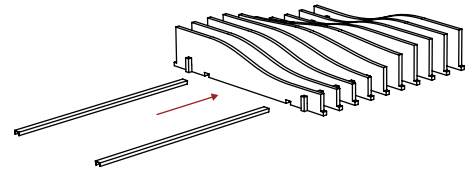


Step 4
Slide the two aluminum rails through all profiles using the slots provided. Remove labels.

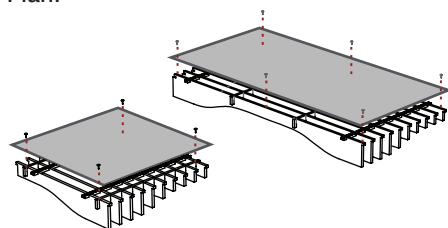

Step 5
Turn assembly over and attach the acoustic mesh to the back of the tile using the pins provided. Note: Pins should be placed close to midpoints and corners.

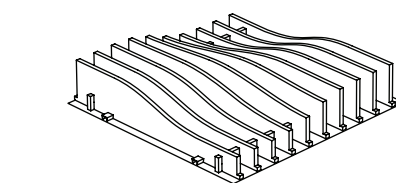

The assembled ceiling tile is complete.



Ceiling Grid Installation
Tile edge notch and tab profiles are designed to capture either 9/16" (15mm) or 15/16" (24mm) ceiling grid profiles. Tiles can be fitted and removed from ceiling grids quickly to access services above.

ECOUSTIC SCULPT™ CARE

Regular Care

- Protect from direct heat and sunlight
- To prevent dust build up, lightly dust with a soft cloth or vacuum with a soft brush attachment

Cleaning

- Professional cleaning is always recommended
- Always test any cleaning products on an inconspicuous area prior to commencing cleaning
- Blot any excess spills from the material with a dry clean sponge or cloth
- Treat all stains and spills as soon as possible
- Most marks can be spot cleaned by lightly wetting the affected area with a mild detergent and warm water solution
- Do not saturate the tile
- Do not scrub or abrade the surface as this will affect the surface finish
- Once the stain or mark has been loosened then blot the excess solution out with a dry clean sponge or cloth
- Sponge afterwards with clean warm water and dry any excess moisture with a dry clean sponge or cloth
- The product can also be spot cleaned with dry cleaning fluid, lightly sponge a small amount of dry cleaning fluid and blot
- Dry away from direct heat and sunlight
- Do not use carpet shampoo