

# ECOUSTIC® LOOP TRIMMING GUIDELINES

All ecoustic® Panel + Screen products must be installed with the correct top-to-bottom orientation to avoid any variation in color and pattern direction.

The print does not extend to the edges of the panel and screen, therefore, an unprinted border occurs on all four sides and the product needs to be trimmed before installation, even if using edging profiles.

Make all measurements and cuts based on the printed pattern and not the edge of the panel and screen. The position of the print may not be centered within the panel and screen border.


Due to the large scale of the printed panels and screens, slight pattern bowing can occur and the edges of the printed design may not be 100% straight.

Please adhere to the following guidelines to ensure the most effective pattern matching from panel to panel in the horizontal direction.


- ecoustic® Panel Loop: take a straight edge and cut vertically in the negative space approx 4mm from the outside of the last printed vertical line on the left and right hand sides. For the top and bottom, take a straight edge and cut horizontally along the tips of the vertical printed lines. Avoid losing any of the printed circle area.
- The design repeats horizontally and vertically, however once trimmed slight variations in the pattern join may occur due to natural variations in the screen printing process.
- ecoustic® Screen Loop: take a straight edge and cut vertically, along the tips of the horizontal printed lines. Avoid losing any of the printed circle area. For the top and bottom, take a straight edge and cut horizontally in the negative space approximately 0.2" from the outside of the last printed horizontal line on the top and bottom edge.
- The design repeats horizontally and vertically, however once trimmed slight variations in the pattern join may occur due to natural variations in the screen printing process. The repeat for the screen is slightly different to the panel.

Due to the artisan nature of the hand printing process, there may be slight variations in the prints so always check panels side by side for correct pattern matching prior to cutting and installing. Joins may be obvious upon installation and there will be a panelling effect.

**Panel: 8' 11 1/16" x 3' 11 5/8"**

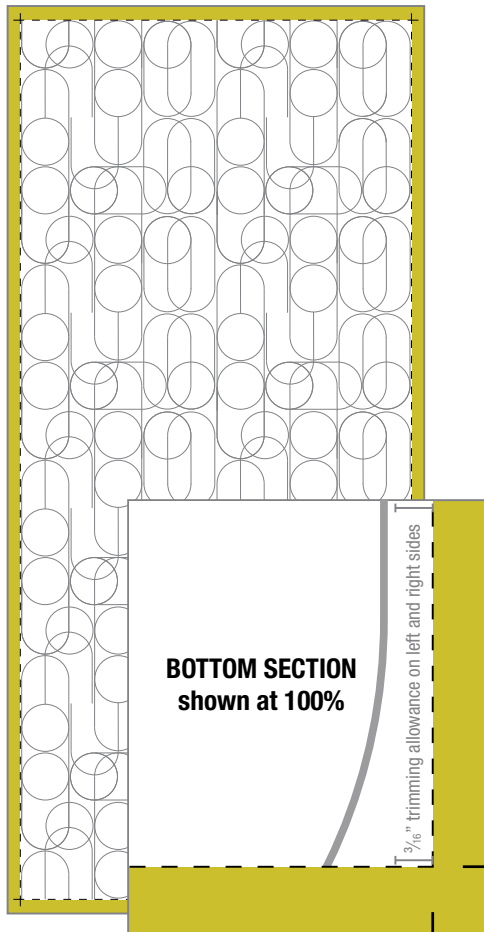

**Screen: 3' 11 5/8" x 7' 11 1/4"**

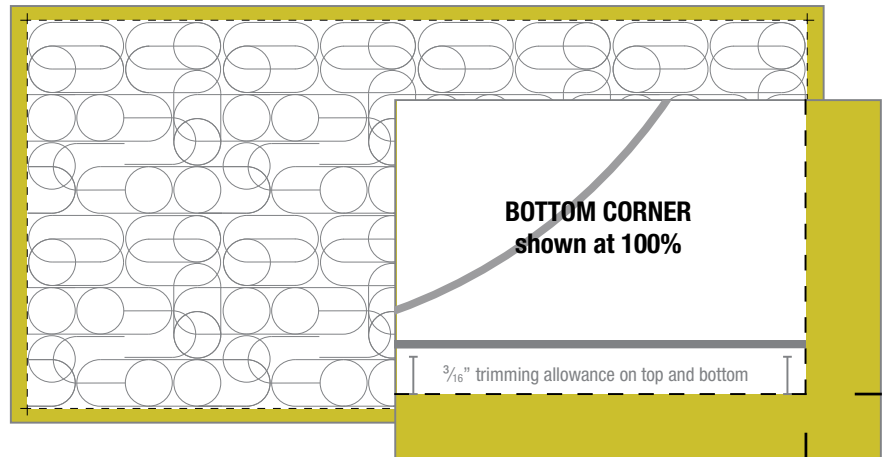

**Screen Size:** 3'11 5/8" x 7'11 1/4"  
**Trim Size:** 3'11 1/4" x 7'10 1/2"  
**Pattern Repeat:** 3'11 1/4" x 7'10 1/2"

**Panel Size:** 8'11 1/16" x 3'11 5/8"  
**Trim Size:** 3'11 1/4" x 7'10 1/2"  
**Pattern Repeat:** 3'11 1/4" x 7'10 1/2"

----- Trimming line

**ecoustic®** global leaders  
 by INSTYLE in acoustic  
 products

# ECOUSTIC® LOOP WORKSTATION TRIMMING GUIDELINES

The printed design does not extend to the border of the workstation screen therefore all four sides need to be trimmed before installation.


Measurements for trimming should be taken from the printed pattern and not the edge of the screen.

When trimming to the maximum size of 3' 11 1/4" x 8' 10 5/16" or when pattern matching is required please adhere to the following guidelines.

- For the long sides, take a straight edge and cut vertically in the negative space approximately 3/16" outside the last printed vertical line.
- For the short sides, take a straight edge and cut vertically, along the tips of the printed lines. Avoid losing any of the printed area.
- The design repeats horizontally and can be joined vertically although not in repeat when used in the full print dimension of 3' 11 1/4" x 8' 10 5/16", however due to the artisan nature of the hand printing process and subsequent trimming, slight variations in the pattern join, and face to back print alignment may occur.
- If pattern matching is required always check the screens side by side for correct pattern alignment prior to cutting and installing. Joins may be obvious upon installation and there will be a panelling effect.

When trimming to smaller dimensions than 3' 11 1/4" x 8' 10 5/16" ensure trimming is positioned within the usable 3' 11 1/4" x 8' 10 5/16" printed area.

## LOOP Workstation Screen

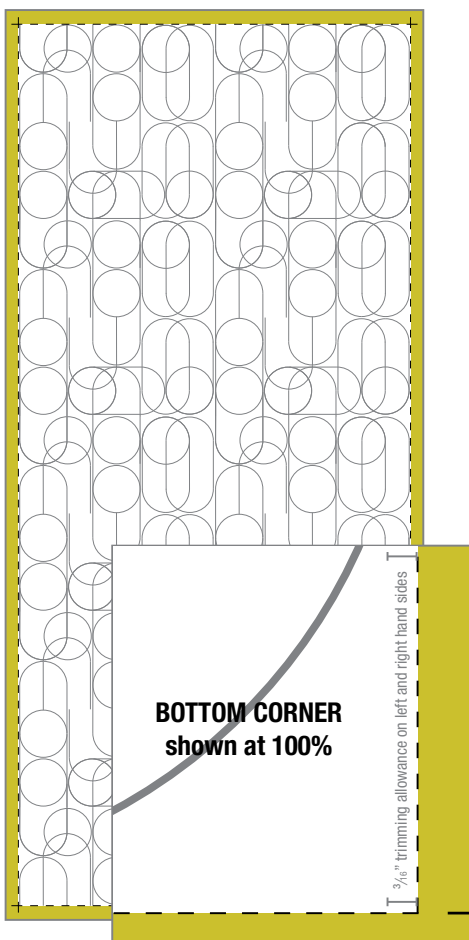

Workstation Screen Size: 4' 1/16" x 9' 2 1/4"

Trim Size: 3' 11 1/4" x 8' 10 5/16"

Pattern Repeat: 3' 11 1/4" x 8' 10 5/16"

----- Trimming line